CV Corp.
120 Commerce Way
Walnut, CA 91789 | Sales: 909-444-1153 | Fax: 909-444-1155

2 WAY NC DIRECT ACTING SOLENOID VALVE, 1/8 – 1/4



normally closed

TYPE: D262/263

TECHNICAL SPECIFICATIONS

Media: water, steam
Media temperature: 14º F - 356º F
Ambient temperature: 14º F - 158º F
Body material: brass (C37700)
Orifice material: stainless steel (AISI 303)
Operator material: stainless steel
Seal material: Rulon
Coil power: AC = 18 VA (holding)
AC = 36 VA (inrush)
DC = 14 W
Protection class: NEMA 4 (with connector)

OPTIONS

Normally open (Ex code RD262DLHN)
Manual override (Ex code D262DLANM)

SELECTION TABLE

VALVES	pipe size	orifice	CV flow rate	Operating Pressure Differential min	max		COILS class "H" only	
					liquids	gas		
Code	(NPT)	(inch)	(gpm)	(psi)	ac	dc	Code	(Volts/Hz)
D262DLAN	1/8	1/32	0.03	0	145	145	7151	12/dc
D262DLCN	1/8	1/16	0.09	0	145	145	7251	24/dc
D262DLGN	1/8	3/32	0.24	0	145	145	7201	24/50/60Hz
D262DLHN	1/8	1/8	0.31	0	145	116	7401	110/50 – 120/60
D263DLAN	1/4	1/32	0.03	0	145	145	7601	200/50 – 220/60
D263DLCN	1/4	1/16	0.09	0	145	145	7701	230/50 – 240/60
D263DLGN	1/4	3/32	0.24	0	145	145		
D263DLHN	1/4	1/8	0.31	0	145	116		

DIMENSIONS & WEIGHTS

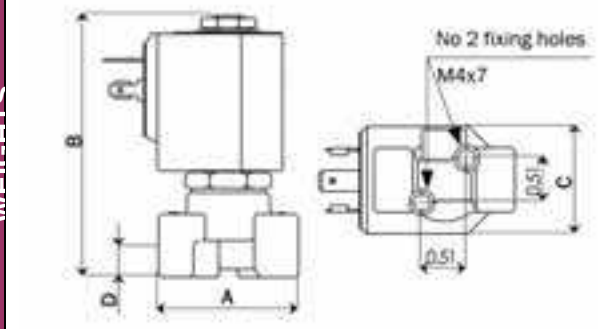

pipe size	A	B	C	D	weight
(NPT)	(inch)	(inch)	(inch)	(inch)	(lbs.)
1/8	1.57	3.05	1.25	0.43	0.57
1/4	1.57	3.05	1.25	0.43	0.57