


## 3 WAY NC DIRECT ACTING SOLENOID VALVE, G 1/8



**normally closed**

**TYPE: B398**

### TECHNICAL SPECIFICATIONS

- Media: water, air, oil, aggressive fluids
- Media temperature: 14° F - 266° F
- Ambient temperature: 14° F - 122° F
- Body material: stainless steel (AISI 303)
- Orifice material: stainless steel (AISI 303)
- Operator material: stainless steel
- Seal material: foodgrade VITON®
- Coil power: AC = 9 VA (holding)  
AC = 14 VA (inrush)  
DC = 6 W
- Protection class: NEMA 4 (with connector)




### OPTIONS

- 1/8" GAS thread (Ex code B398EV3)
- CE coils on request (Ex code 2700)

**SELECTION TABLE**

VALVES	pipe size	orifice	CV flow rate	Operating Pressure Differential			COILS	
				min	max			
					liquids	gas	Code	(Volts/Hz)
Code	(NPT)	(inch)	(gpm)	(psi)	ac	dc	Code	(Volts/Hz)
B398EV2N	1/8	3/64	0.05	0	217	217	225R	24/dc
B398EV3N	1/8	1/16	0.07	0	145	145	220R	24/50 - 60
B398EV5N	1/8	5/64	0.13	0	72.5	72.5	240R	110/50 - 120/60
B398EV7N	1/8	3/32	0.19	0	43.5	43.5	260R	200/50 - 220/60
							270R	230/50 - 240/60

**DIMENSIONS & WEIGHTS**

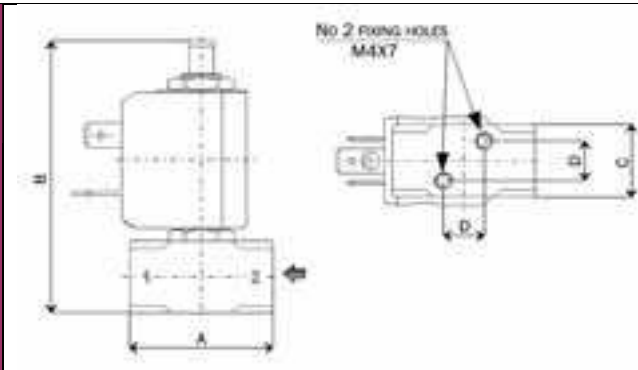

pipe size	A	B	C	D	weight
(NPT)	(inch)	(inch)	(inch)	(inch)	(lbs.)
1/8	1.4	2.7	0.7	0.4	0.22